


Transponders



LUX-IDENT's products

LUX-IDENT s.r.o., Tovární 368, 563 01 Lanškroun, Czech Republic
Tel.: +420 465 352 500, Fax: +420 465 352 501, e-mail: sales@lux-ident.com
www.lux-ident.com

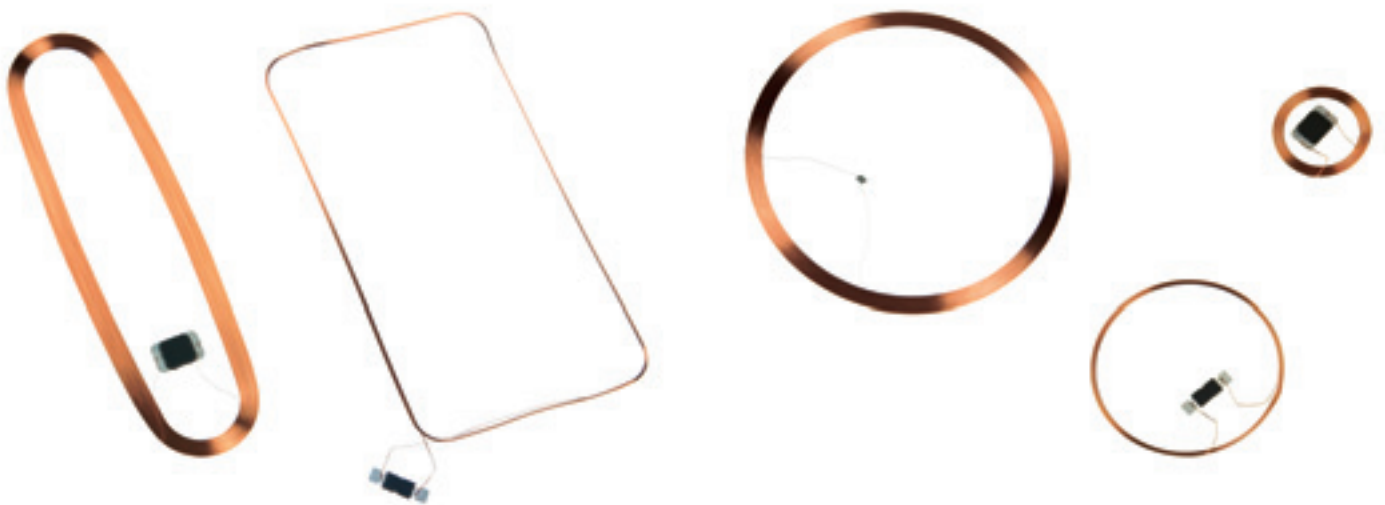


A range of applications.

The transponder is the heart of all our products. It consists of a copper-wire antenna attached to an integrated circuit chip requiring no further encapsulation.

We make non-capsulated transponders that range in diameter from 5 mm to 120 mm. While most of our clients prefer round-shaped coils, we can also make different shapes and formats upon request. Sophisticated coil winding combined with fine frequency tuning gives LUX-IDent transponders an excellent read/write performance.

Dimensions

(inner diameters in mm)

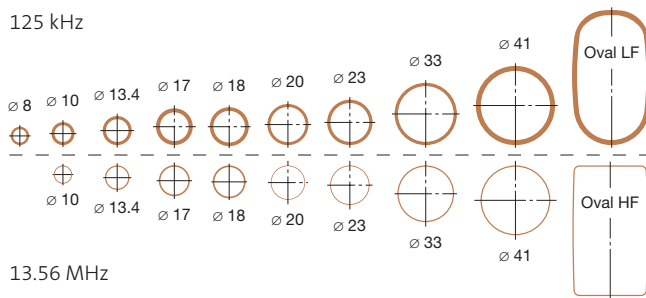

Other dimensions upon request.



Available chip technologies

Manufacturer frequency	Chip type
EM Microelectronic	
LF 125 kHz / 134.2 kHz	EM4102, EM4305, EM4450
NXP	
LF 125 kHz / 134.2 kHz	Hitag 1, Hitag 2, Hitag S 256bit, Hitag S 2048bit
HF 13.56 MHz	Mifare: Ultralight, Ultralight C, Mini, Classic 1K, Classic 4K, Desfire 4K V.06, Desfire 2K EV1, Desfire 4K EV1, Desfire 8K EV1, Plus S 2K, Plus S 4K, Plus X 2K, Plus X 4K I-Code: SL1, SLI-L, SLI, SLI-S SmartMX, JCOP
Infineon	
HF 13.56 MHz	Mifare SLE66R35 1K, My-D: SRF55V02P, SRF55V10P, NFC SLE66R16P, NFC SLE66R32P
Atmel	
LF 125 kHz / 134.2 kHz	ATA5575M1, ATA5575M2, ATA5577, Q5
Inside Secure	
HF 13.56 MHz	Picopass 2K, 32K
Legic	
HF 13.56 MHz	Prime MIM256, Prime MIM1024 Advant: ATC128, ATC256, ATC1024, ATC2048, ATC4096

Other ICs are available upon request.